

**DECLARATION OF PERFORMANCE**  
**According to Regulation (EC)305/2011**  
**No 1-3-CPR-2013**

1. Unique identification code of the product-type:  
Fireplace stoves burning wood  
EN13240:2001/A2:2004/AC:2007  
HF-706  
Yugang Avenue, Airport District, 450000,  
Zhengzhou China,  
E-mail: olymberyl@gmail.com
2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):  
Serial No (see rating label on the product)
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:  
Freestanding fireplace for intermittent burning without hot water supply, with firedoor closed.
4. Name, registered trade name and contact address of the manufacturer as required pursuant Article 11(5):  
Henan Hi-Flame Metal Co.,Ltd; East side,
5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in annex V:  
System 3
7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:  
KONTROL 94 Ltd, 2Mladost Str. 5100 Gorna Oryahovitsa, Notify Body 1897, Bulgaria  
Test report: No.1897-K-27-2014,15.07.2014



**DECLARATION OF PERFORMANCE**  
**According to Regulation (EC)305/2011**  
**№ 1-3-CPR-2013**


8. Declared performance

<b>Harmonised technical specification</b>	EN 13240:2001/A2:2004/AC:2007
<b>Essential characteristics</b>	performance
<b>Fire safety</b>	
Reaction to fire	A1
Distance to combustible materials	Minimum distances, in mm sides=500 rear=500 front=800
Risk of furning fuel falling out	Pass
<b>Emission of combustion products</b>	CO [0.1140%]wood;
	dust[-mg/m3]
	NOx[-mg/m3]
	CxHy[-mg/m3]
<b>Surface temperature</b>	Pass (operating tool)
<b>Electrical safety</b>	NPD
<b>Cleanability</b>	Pass
<b>Maximum water operating pressure</b>	-bar
<b>Flue gas temperature at nominal heat output</b>	T[227°C];wood
<b>Mechanical resistance(to carry a chimney/flue)</b>	NPD
<b>Thermal output</b>	
Nominal output	5.35kW wood;
Room heating output	5.35kW wood;
Water heating output	-kw
<b>Energy efficiency</b>	η[74.38]wood;

9. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

01.08.2014  
Zhengzhou

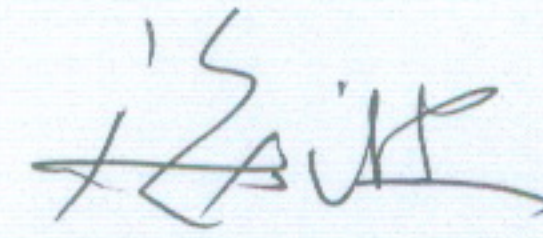

Haibo –Marketing Manager

河南和福来金属有限公司  
HENAN HI-FLAME METAL CO., LTD.  
马士武